


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 17 TOWNSHIP 14 RANGE 5  
DATE: -4-26-2000 1-16-07  
PARTY CHIEF: Wilcoxon  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison  
METHOD OF ESTABLISHMENT: County: 1-17-95

IN. S.P.C. E ZONE, NAD 83  
NAME: 14051704  
N: 489780.4256(m)  
E: 70618.9560(m)

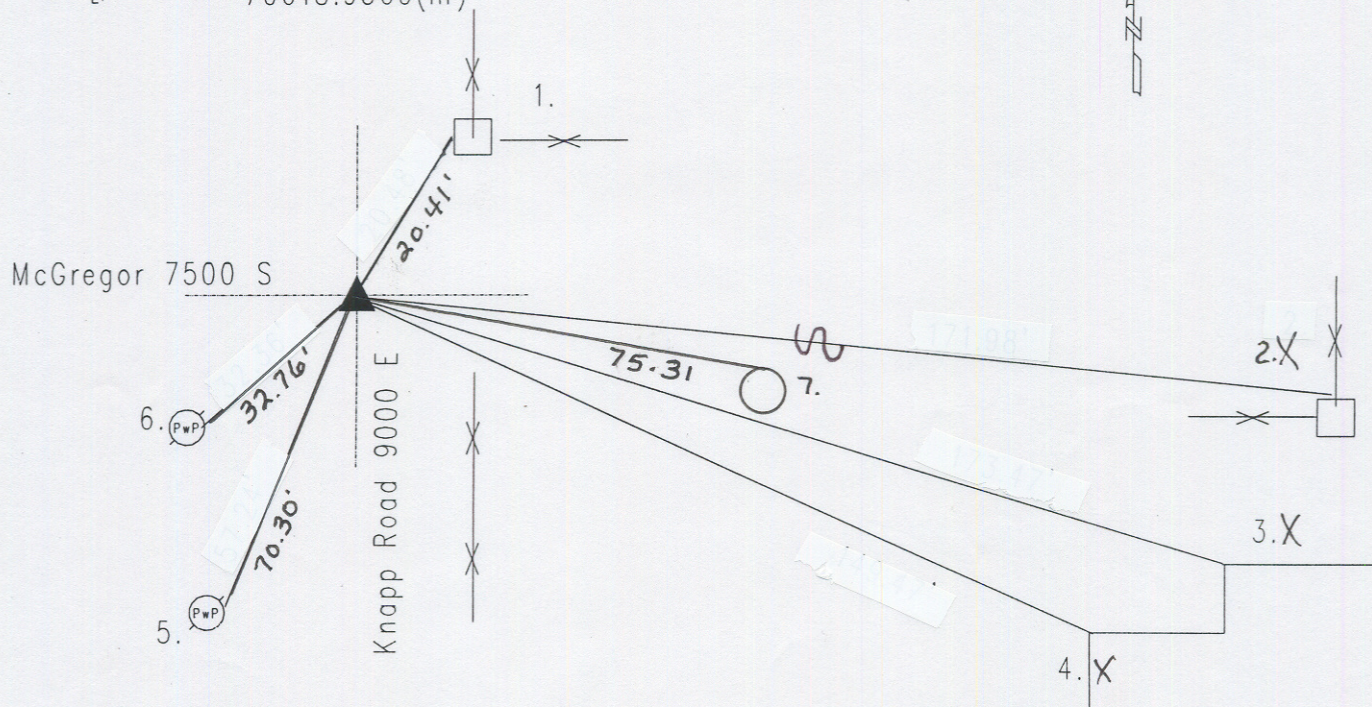

Original post 1820 by Hendricks with witnesses: 16" beech N 30 E 10 links, 4" dogwood S 20 E 29 links per Marion County Atlas pg. 13. Hosbrook 2-18-1852 called stone set with witnesses: 5" beech S 23 E 32 links, 12" beech S 45 E 10 1/2 links. Thompson 2-1-44 called stone 2" down. Monroe 9-15-56 called the same. McLand 5-10-71 called stone 4" down. Fortner 12-2-74 called PK nail at surface over stone 4" down. Greene 6-26-86 called the same. Greene 10-16-90 excavated and PK nail found at surface. Stone fd 4" down w/hubs beside it. Stone fd 10" down, but appeared knocked over. Set Harrison. Re-tied 4-26-2000 by Wilcoxon.

HC 451704

REF.	DISTANCE	DESCRIPTION
1.	20.41'	PK nail W corner fence post <del>10"up</del> 6"up
2.	<del>171.98'</del>	<del>PK nail N corner fence post 12"up</del>
3.	<del>173.47'</del>	<del>NW corner of 2-story wooden barn 36"up</del>
4.	<del>149.47'</del>	<del>NW corner of 2-story wooden barn 36"up</del>
5.	70.30'	<del>PK</del> nail E PwP#4-801 12"up (mag nail w/bw)
6.	32.76'	<del>PK</del> nail E PwP#003-801A (mag nail w/bw) 12"up
7.	75.31'	Mag nail w/bw N PwP no# 12"up